




## Heavy Duty Granulator

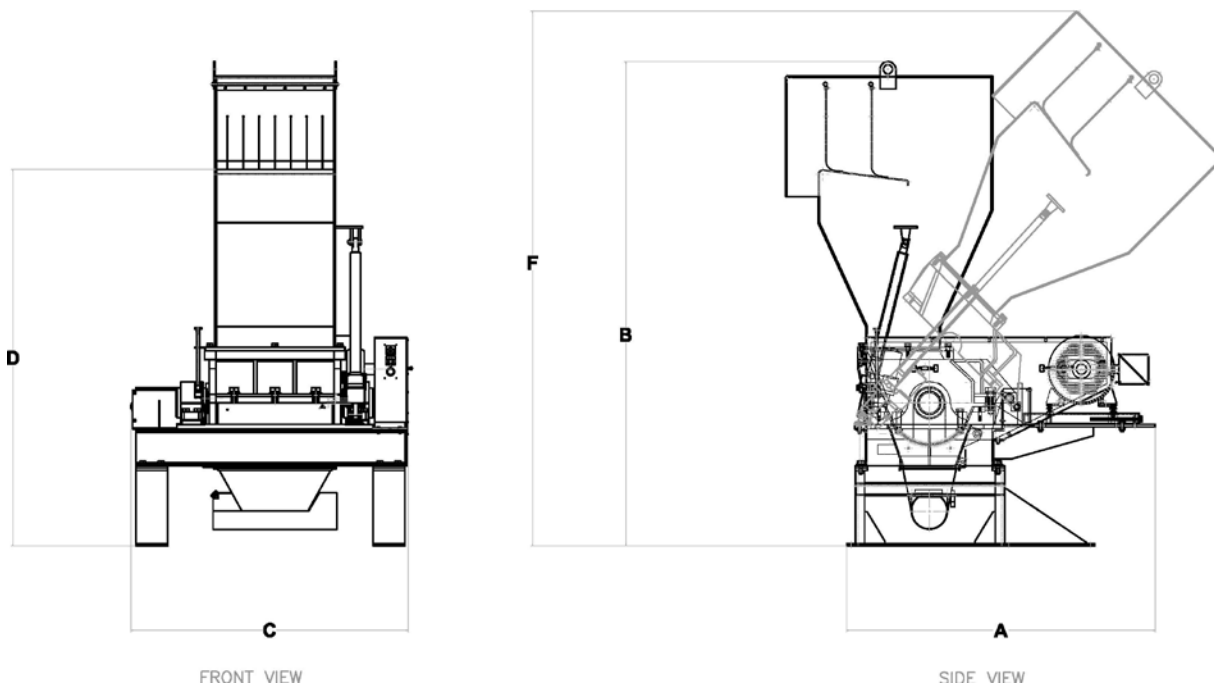

DIMENSIONS							
MODEL		A	B	C	D	E	F
1626	in.	81	60	103.5	73.5	118	91.5
	(mm)	(2058)	(1524)	(2629)	(1867)	(2997)	(2324)
2441	in.	120	78	147	103.5	168.5	145.5
	(mm)	(3048)	(1981)	(3734)	(2629)	(4153)	(3696)

SPECIFICATIONS			
MODEL		1626	2441
Throat Size at Chamber *	in. (mm)	16 x 26 (406 x 660)	24 x 41 (610 x 1041)
Screen Area	in. <sup>2</sup> (cm <sup>2</sup> )	490 (3160)	1214 (7820)
Motor**	HP (kw)	50-75-100 (37-56-75)	100-150-200 (75-112-149)
Drive	V-Belt	Sheave Flywheel Optional	Solid Flywheel
Cutting Circle (dia.)	in. (mm)	17.25 (438)	24 (610)
Rotor Knives	number	3	3 (6 pieces)
Bed Knives	number	2	2 (4 pieces)
Weight	lbs. (kgs)	5700 (2590)	14000 (6364)
Throughput***	lbs./hr (kgs/hr)	2500 (1140)	6000 (2730)

\* Measured at entrance to chamber.

\*\* Open Drip –Proof (ODP) standard, totally enclosed fan –cooled (TEFC) optional

\*\*\* Average figures, throughput varies with different materials and part shapes.